

W=600 FRONT DOOR MODEL

The standard front door model for W = 600 Versatile cabinets is the full length door model with **aluminum extruded frame**.

Front glass door is 4mm thick, smoke colored, antistatic, tempered full length glass with high resistance against shattering with single point locking handled lock.

Custom design aluminum extruded glass frame not only provides robustness, but also adds aesthetic and decorative appearance to the cabinet.

The lock mechanism is **handled lock** type mechanism.

The colored PVC stripe installed on the aluminum glass frame complements the appearance.

Fitted with **spring Loaded hinge system**, the glass front door enables ease of installation and use as the opening direction can be modified easily, and the door can be removed and reinstalled without use of any tool, when desired.



W=800 FRONT DOOR MODEL

The standard front door model for W = 800 Versatile cabinets is the vertically split full length **double glass door** model with aluminum extruded frame.

Front glass door is 4mm thick, smoke colored, antistatic, tempered full length glass with high resistance against shattering with handled lock.

Custom design aluminum extruded glass frame not only provides robustness, but also adds aesthetic and decorative appearance to the cabinet.

The lock mechanism is **barrel lock** type mechanism.

Ensures safe use with double-point locking structure As it can be locked from top and bottom with 2 barrel locks.

Screw-coupled aluminum extruded interlocking glazing strips are installed at the junction of the left and right glass doors at the center, which enable full engagement of both wings with no spacing in-between.

The colored PVC stripe installed on the aluminum glass frame complements the appearance.

Fitted with spring Loaded hinge system, the glass front door enables ease of installation and use as the opening direction can be modified easily, and the door can be removed and reinstalled without use of any tool, when desired.



SIDE AND REAR DOOR MODEL

The standard front side and rear door model for the Versatile cabinets is the removable **horizontally split double door** model.

Horizontally split double door model enables easy removal and transportation of the side and rear doors during installation and maintenance & repairs.

Easily removable side and rear doors are fitted with single **barrel locking** mechanism.

By virtue of the **snap locking** system installed on the side and rear doors, the doors can remain closed on the cabinet without being locked.

Thanks to the custom design at the horizontally split double doors; the lower door cannot be removed without removing the upper door first. With such arrangement, **when the upper door is locked, the lower door is also locked.**

In case any fan module will be installed at side panels, 63% perforated type options are available for horizontally split double side panels.

The side and rear doors fitted with hinged system might be preferred among the great variety of door options available.



REAR CABLE INLETS

Brushed cable entry holes with 60mmX300mm dimensions are available on the **top and bottom** of the rear door for 22U and higher standard Versatile Cabinets



ROOF MODEL

Standard roof model for Versatile cabinets is the **pagoda** model.

As Pagoda type roof is installed **10mm above** the cabinet, the roof ensures active ventilation when the fan module is installed and passive ventilation when no fan module is installed, and further provides protection against dipping water and dust.

The decorative PVC retainer parts installed at the corners of the roof complete decorative coherence of the cabinet and the roof.



GROUND CONTACT

The ground contact of the cabinet in all standard Versatile cabinet configurations are ensured by means of 4 leveling feet with adjustable **height installed** at the bottom corners of the cabinet. Caster group, 2 with brakes and 2 without brakes, are available as an option.




GT V 600 x 600 FREE STANDING CABINET

WIDTH W: 610mm
DEPTH D: 610mm




COLOR OPTIONS



LOADING CAPACITY : 1000kg

EXPLODED VIEW

WIDTH W: 610mm
DEPTH D: 610mm

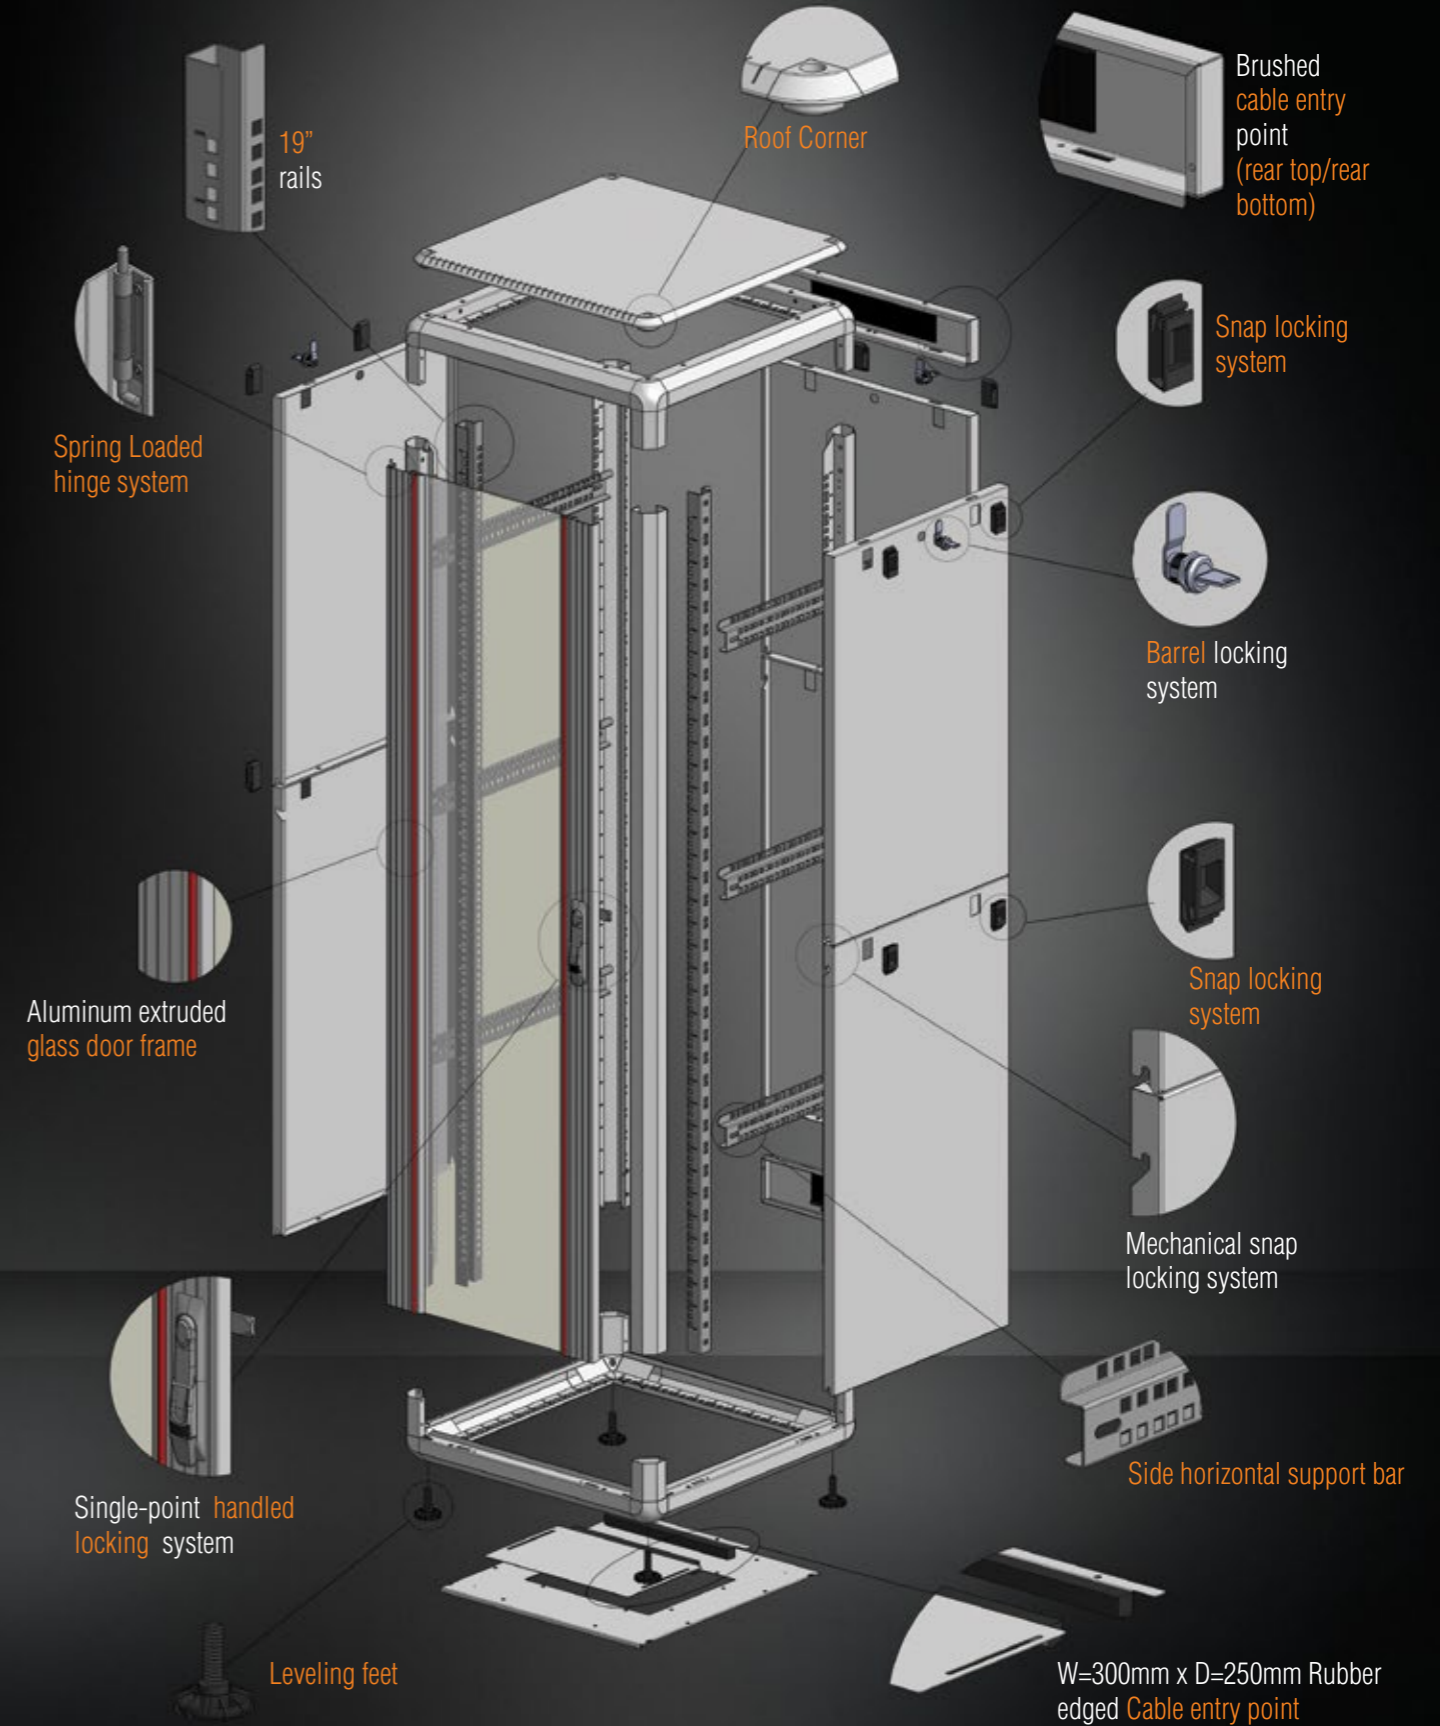


CONSTRUCTION DRAWINGS

WIDTH **W: 610mm**
DEPTH **D: 610mm**



W=600 DOOR OPTIONS

WIDTH **W: 610mm**
DEPTH **D: 610mm**

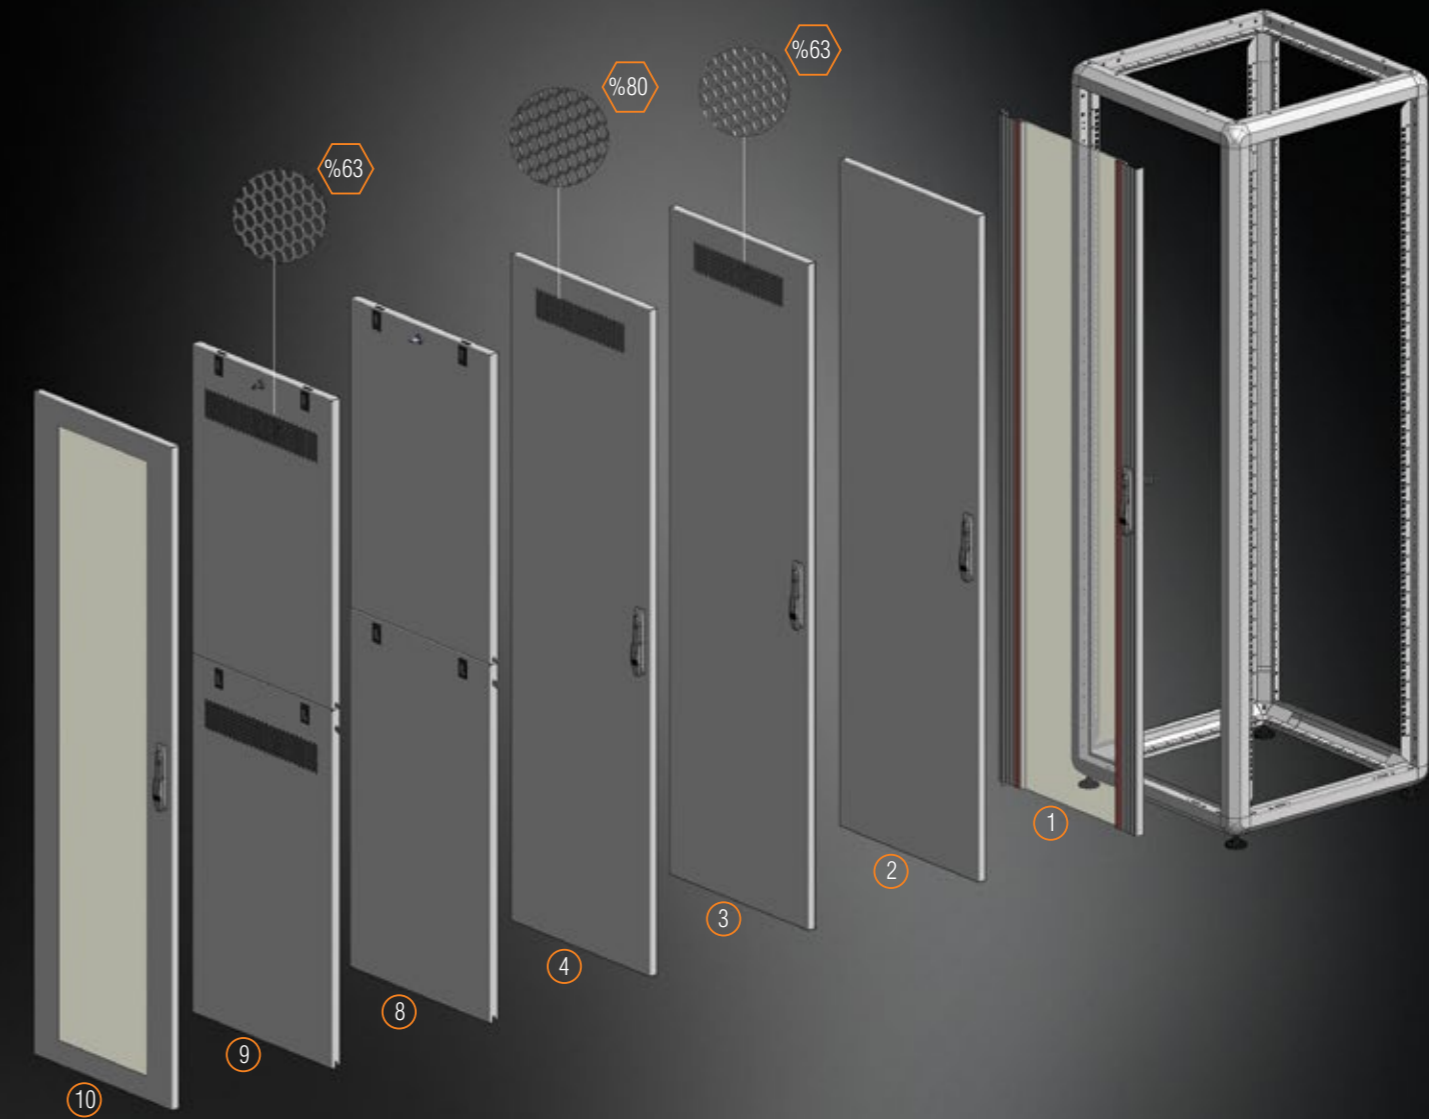

W=600 door options can be mounted on all surfaces of the cabinet.

GT SERIES **VERSATILE** FREE STANDING CABINET W=610mm D=610mm

Product Code	Product Description	U Measurement (U)	Product Dimensions WxDxH (mm)	Width: Between Rails	Depth: Between Rails (mm)	U Measurement (mm)	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Gross Weight (kg)	Number on Pallet (pcs)	Pallet Dimensions WxDxH (mm)	Pallet Weight (kg)	Height: with Leveling Feet (mm)	Height: with Caster Group (mm)
MR.GTV12U66.XX	12U W=610mm D=610mm VERSATILE	12U	610x610x719	19"	390	594	680x680x849	1	30,6	37,8	2	680x680x1698	75	749	779
MR.GTV16U66.XX	16U W=610mm D=610mm VERSATILE	16U	610x610x897	19"	390	772	680x680x1037	1	36,9	44,5	2	680x680x2074	89	927	957
MR.GTV20U66.XX	20U W=610mm D=610mm VERSATILE	20U	610x610x1075	19"	390	950	680x680x1215	1	43,2	51,2	2	680x680x2430	102	1105	1135
MR.GTV22U66.XX	22U W=610mm D=610mm VERSATILE	22U	610x610x1164	19"	390	1039	680x680x1305	1	46,4	54,6	2	680x680x2610	109	1194	1224
MR.GTV26U66.XX	26U W=610mm D=610mm VERSATILE	26U	610x610x1342	19"	390	1217	680x680x1482	1	52,7	61,3	1	680x680x1482	61,3	1372	1402
MR.GTV32U66.XX	32U W=610mm D=610mm VERSATILE	32U	610x610x1608	19"	390	1483	680x680x1748	1	62,2	71,3	1	680x680x1748	71,3	1638	1668
MR.GTV36U66.XX	36U W=610mm D=610mm VERSATILE	36U	610x610x1786	19"	390	1661	680x680x1926	1	68,5	77,7	1	680x680x1926	77,7	1816	1846
MR.GTV40U66.XX	40U W=610mm D=610mm VERSATILE	40U	610x610x1964	19"	390	1839	680x680x2104	1	74,8	84,9	1	680x680x2104	84,9	1994	2024
MR.GTV42U66.XX	42U W=610mm D=610mm VERSATILE	42U	610x610x2053	19"	390	1928	680x680x2193	1	78	88,2	1	680x680x2193	88,2	2083	2113
MR.GTV46U66.XX	46U W=610mm D=610mm VERSATILE	46U	610x610x2231	19"	390	2106	680x680x2371	1	84,3	94,8	1	680x680x2371	94,8	2261	2291

XX=Color Code, 22 means Light Grey RAL 7035 and 11 means Black RAL 9005, the code is added by the customer at the order.

The door width to be selected should be selected among the door options with the related surface dimensions. When one of the door options is selected, it should be informed at the order with its selected surface.

The number 0 from the door options stands for "doorless". The standard door options: Front Door=1, Side Door=8, Rear Door=8.